


MaxSave

Induction Lamp MAX-CK-202

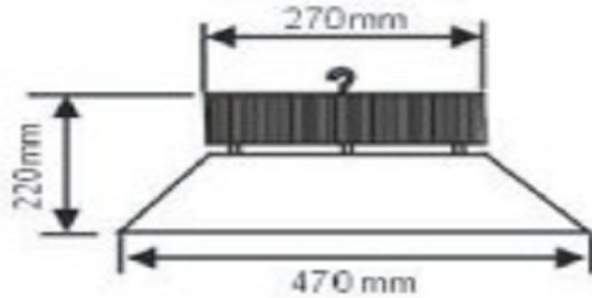

Fixture Sizes (Unit:)

Features

- 1.Lamp Mounting fixture is made from high-grade stretched aluminum cast with anodized surfaces.
- 2.Wave-shaped reflector optimize light distribution
- 3.Special thermal design for longer lifespan
- 4.IP Class:IP65(Ballast case)IP54(Lamp Housing).

Specifications

Model	Power (W)	Voltage (V)	Power factor	Environ Temp	CCT	Replace HPS Lamp
XP-CK-202	40W	100~300V	≥0.96	-25°C to +50°C	5000K	70W
XP-CK-202	80W	100~300V	≥0.96	-25°C to +50°C	5000K	100W
XP-CK-202	120W	100~300V	≥0.96	-25°C to +50°C	5000K	150W
XP-CK-202	150W	100~300V	≥0.96	-25°C to +50°C	5000K	150W
XP-CK-202	200W	100~300V	≥0.96	-25°C to +50°C	5000K	250W

* Note: The CCT can available range is 2700K~6500K .



Distribution curve flux

