


# MaxSave Street Light Model:MAX-LD-301

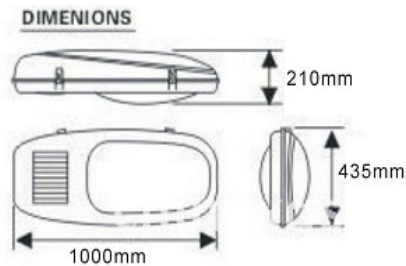

Watt	Rectangular-Bulb Dimension WxDxH(mm)	Luminous Flux (LM)	Luminous Efficiency Lm/W	Color Temperarute (K)
120W	370x145x85	10,200	80-85	2700K-6400K
150W	400x145x85	12,750	80-85	
200W	450x150x90	17,000	80-85	
300W	500x152x90	27,000	85-90	

Category	Induction Street Light
Power	80W-300W
Light Source	Rectangular Induction Lamp
Lifespan	60,000-100,000 hours
High Power Factor	0.98
Working Voltage	AC 100V-300V
Working Temp.	-25°C to +50°C
Material	<ol style="list-style-type: none"> <li>1.The fixture body is made of high pressure die-casting Alu</li> <li>2.High-intensity, high temperature resistant cambered tempered glass</li> <li>3.Once shaping high-purity aluminum reflector provides optimum light distribution</li> <li>4.Electrostatic spray surface treatment technology</li> <li>5.Match rectangular induction lamp with its excellent Color Rendering Index and light efficiency, long life span, no flicker and energy saving, wide range of color temperature and soft light ,stable light output.</li> </ol>
Applications	Roads, streets, highways,viaducts,bridges and other lighting areas